


Long Term Structural & Wall Drainage Systems

WALL PANEL

The Flo-Wall® range is suitable for retaining walls, foundation walls, basements, underground car parks, bridge abutments, civil structures, tunnels and anywhere hydrostatic pressure relief is required.

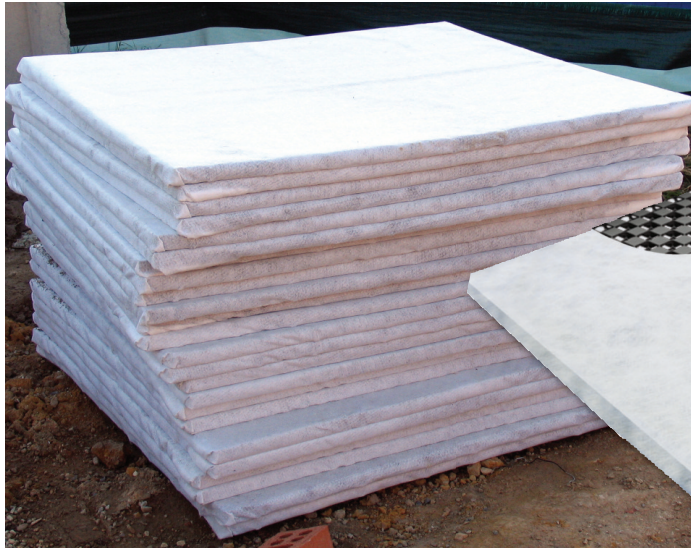

“Save time & labour while getting the job done right the first time”

Ezi Order	Product Size
ATLANTISWPG	Atlantis Wall Panel 1.2x1.2m with Geotex

RAPID DRAINAGE

The Atlantis Flo-Wall® range is ideal for the rapid drainage of saturated ground. The Flo-Wall® range is suited for applications including underground car parks, basements, retaining walls and seepage cutoff trenches.

HIGH STRENGTH

The Atlantis Flo-Wall® range features high compressive strength that will not crush over time ensuring long term drainage performance.

HYDROPHILIC GEOTEXTILE


The Flo-Wall® range are prefabricated products wrapped with a high quality Italian made geotextile with hydrophilic properties for effective drainage that does not require a head of pressure to perform.

UNLIMITED LENGTH

Easily connected together to form the lengths required for the project, provided with an overlap allowance of geotextile to be appropriately sealed with tape.



Part Number	10412	10418	10424	11212	10519	30014
Width	400 mm (15.7")	400 mm (15.7")	400 mm (15.7")	1200 mm (47.2")	260 mm (10.2")	100 mm (3.93")
Height	1200 mm (47.2")	1800 mm (70.8")	2400 mm (94.5")	1200 mm (47.2")	1920 mm (75.6")	1080 mm (42.52")
Thickness	30 mm (1.18")	30 mm (1.18")	30 mm (1.18")	30 mm (1.18")	52 mm (2.04")	80 mm (3.14")
Weight	1.49 kg (3.28 lbs)	2.24 kg (4.93 lbs)	2.98 kg (6.56 lbs)	4.47 kg (9.85 lbs)	2.60 kg (5.73 lbs)	0.62 kg (1.36 lbs)
Flow Rate @ 0.5% gradient (Approximate)	178 L/m	178 L/m	178 L/m	533 L/m	267 L/m	80 L/m

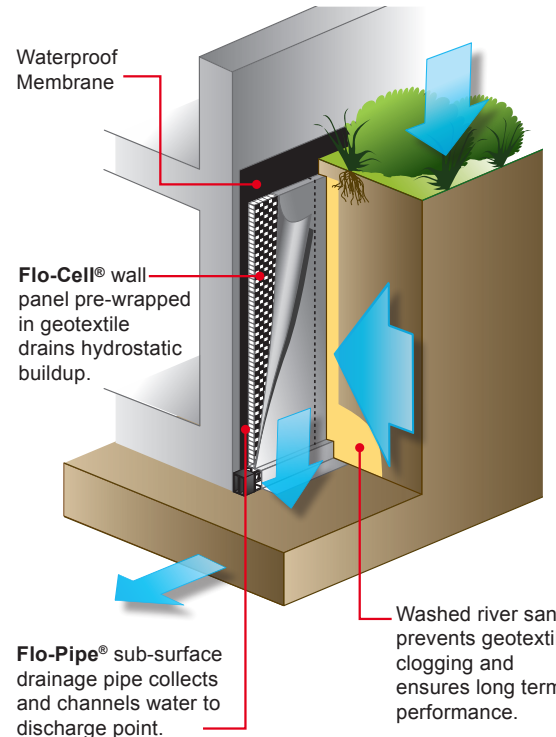

TIMBERFIX

sales@timberfix.com.au
www.timberfix.com.au

1300 888 729

ORDER UP TIL 5PM FOR
NEXT MORNING DELIVERY




- HARDWARE
- SITE SUPPLIES
- FASTENERS

Long Term Structural & Wall Drainage Systems



DRAINAGE CELL

30mm thick, 405mm x 607mm panels. No fabric included.
Interlocking panels. 4 pieces needed per m2.

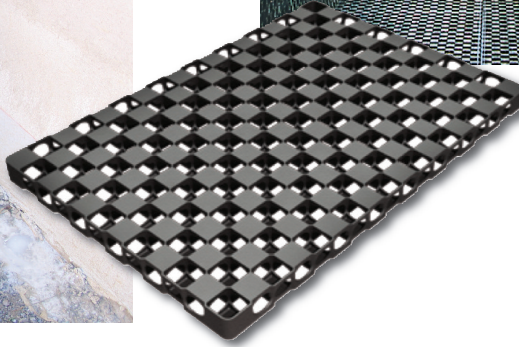

Ezi Order	Product Size
ATLANTISDRC	Atlantis Drainage Cell 405 x 607mm

Material	85% Recycled PP, 15% Propriety Materials
Size	(T)30 x (W)406 x (H)605
Width	406mm (16")
Height	30mm (1.18")
Length	607mm (23.9")
Part Weight	710 grams (25 oz.)
Weight m² ft²	2.89 kg/ m ² (6.37 lb/10.76 ft ²)
Flow Rate	7.4 L/s/m (35.8 Gal/min/ft) @ 0.5% gradient
Pieces per m² / (ft²)	4 / (16.76)
Compressive Strength	76 t/m ² (108 psi)

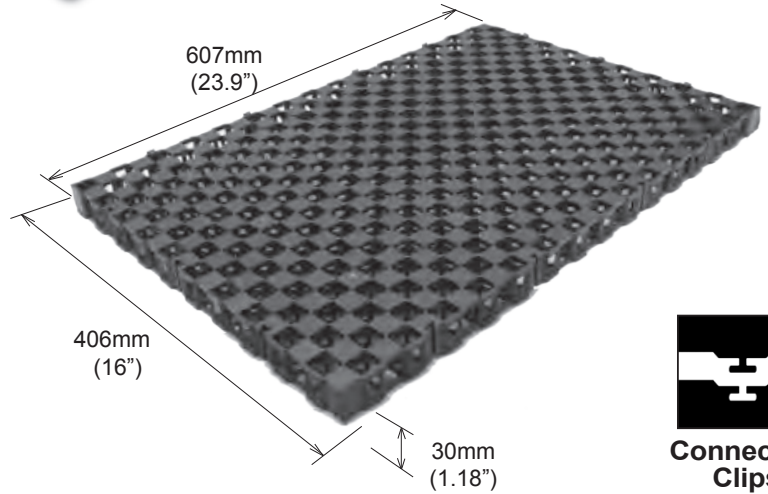


THE HIGH PERFORMANCE AG PIPE ALTERNATIVE

The Atlantis Flo-Pipe® & Flo-Log® sub surface pipes are suitable for situations that require rapid drainage, high flow and strong compressive strength.

VERSATILE APPLICATIONS

The Atlantis Flo-Pipe® provides the most effective solution for applications such as trench and strip drainage, retaining wall drainage, edge drainage for roads, sports field drainage systems and for sub-surface water dispersal requirements.

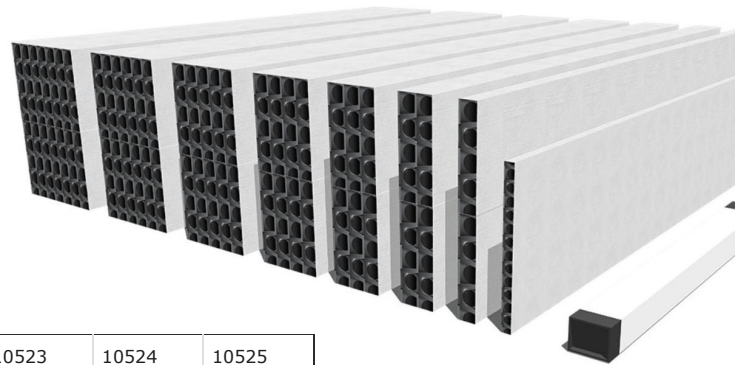

Part Number	30014	80030	10519	10520	10521	10522	10523	10524	10525
Width	100 mm	30 mm	52 mm	104 mm	156 mm	208 mm	260 mm	312 mm	364 mm
Height	80 mm	405 mm	260 mm	260 mm	260 mm	260 mm	260 mm	260 mm	260 mm
Length	1080 mm	1860 mm	1920 mm	1920 mm	1920 mm	1920 mm	1920 mm	1920 mm	1920 mm
Weight	0.62 kg	2.98 kg	2.6 kg	5.2 kg	7.8 kg	10.4 kg	13 kg	15.6 kg	18.2 kg
Geotextile	Hydrophillic non woven geotextile								
Surface Area	95% void								

**PHONE FOR
PRICING &
AVAILABILITY
OF THIS
PRODUCT**



TIMBERFIX

sales@timberfix.com.au
www.timberfix.com.au

1300 888 729

ORDER UP TIL 5PM FOR
NEXT MORNING DELIVERY



- HARDWARE
- SITE SUPPLIES
- FASTENERS